





Sheer plan perpendicular to roof



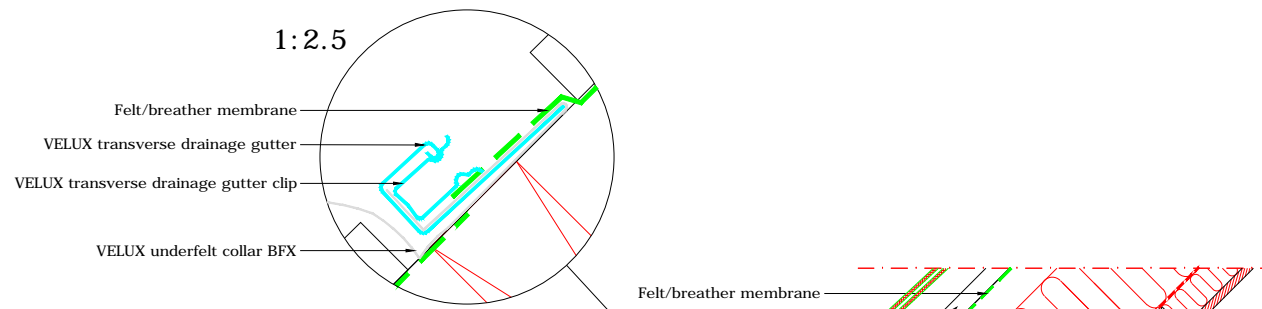

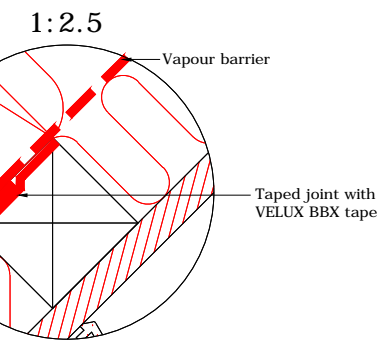

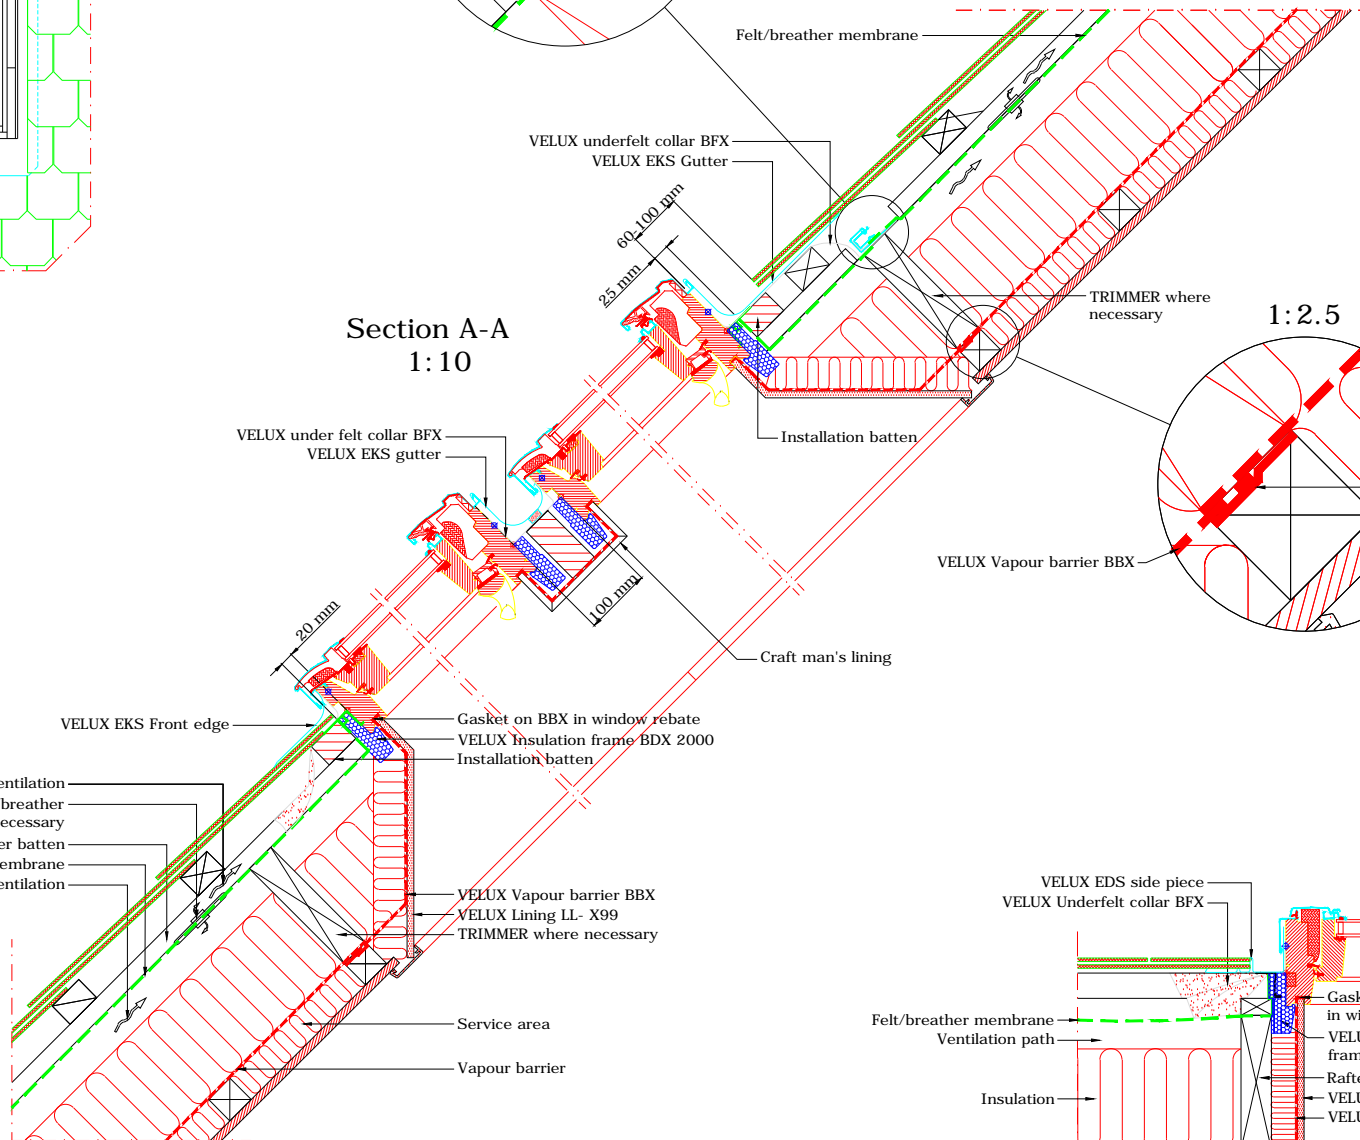

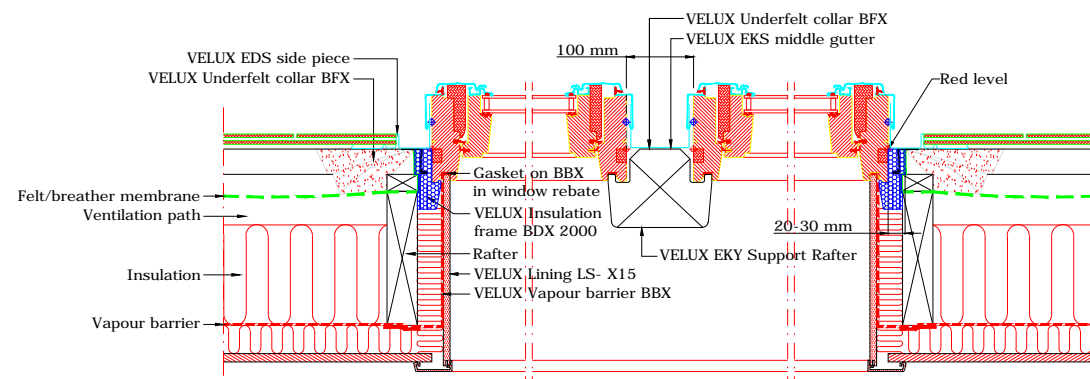



Section A-A
1:10



Section B-B
1:10



VELUX Products:

-  GGL
15°-90°
-  EKS --21-
15°-90°
-  EKS ---4--
15°-90°
-  EKS ---6--
15°-90°
-  BFX
-  BDX 2000
-  LS- X15 BBX
-  LL- X99 BBX
-  EKY
15°-90°
- Roof covering:
 SLATES
< 8 mm

© VELUX GROUP ® VELUX, VELUX logo are registered trademarks

VELUX		VELUX A/S		<small>Get more daylight Get more comfort Use less energy</small>
VELUX Roof Window GGL+GGL install in tiles high profiled	Date 26.08.2014	File name	Drawing no.	
VELUX insulation collar BDX 2000 and under felt collar BFX	All measurement in mm	EKS22-GGL-XXX-0814	-	
VELUX flash. EKS + VELUX lining X99 + EKY		-		
VELUX vapour barrier collar BBX	SCo			

Note:
When installing VELUX Roof Windows, flashings and installation products, the manufacturers instructions and current building and fire regulations, where applicable, must be met.